


**Source:** Leece-Neville Heavy Duty Systems Division – Arcade, NY  
**Bulletin No:** TSB-1195 **Date:** February 2, 2022  
**Models:** 8MR  
**Subject:** 8MR to A1737, A1739, A1742

Alternator 8MR is discontinued and replaced by A17xx range of refrigeration alternators.  
 8MR2316L, 8MR2326L, 110-606, 110-646 (Earth return) = A1739B  
 8MR2313U, 8MR2325U, 110-608, 110-643 (Insulated return) = A1742B

These alternators are direct mechanical (drop-in) replacements; however, they are **case ground (earth return)** machines.

**Note:** A1737, A1739 and A1742 have internal cooling fans. External fan used on 8MR is not needed.

This document will help identify terminal location variances.  
 For detailed wiring diagram of the A1737, A1739, A1742 see TWB-0065.

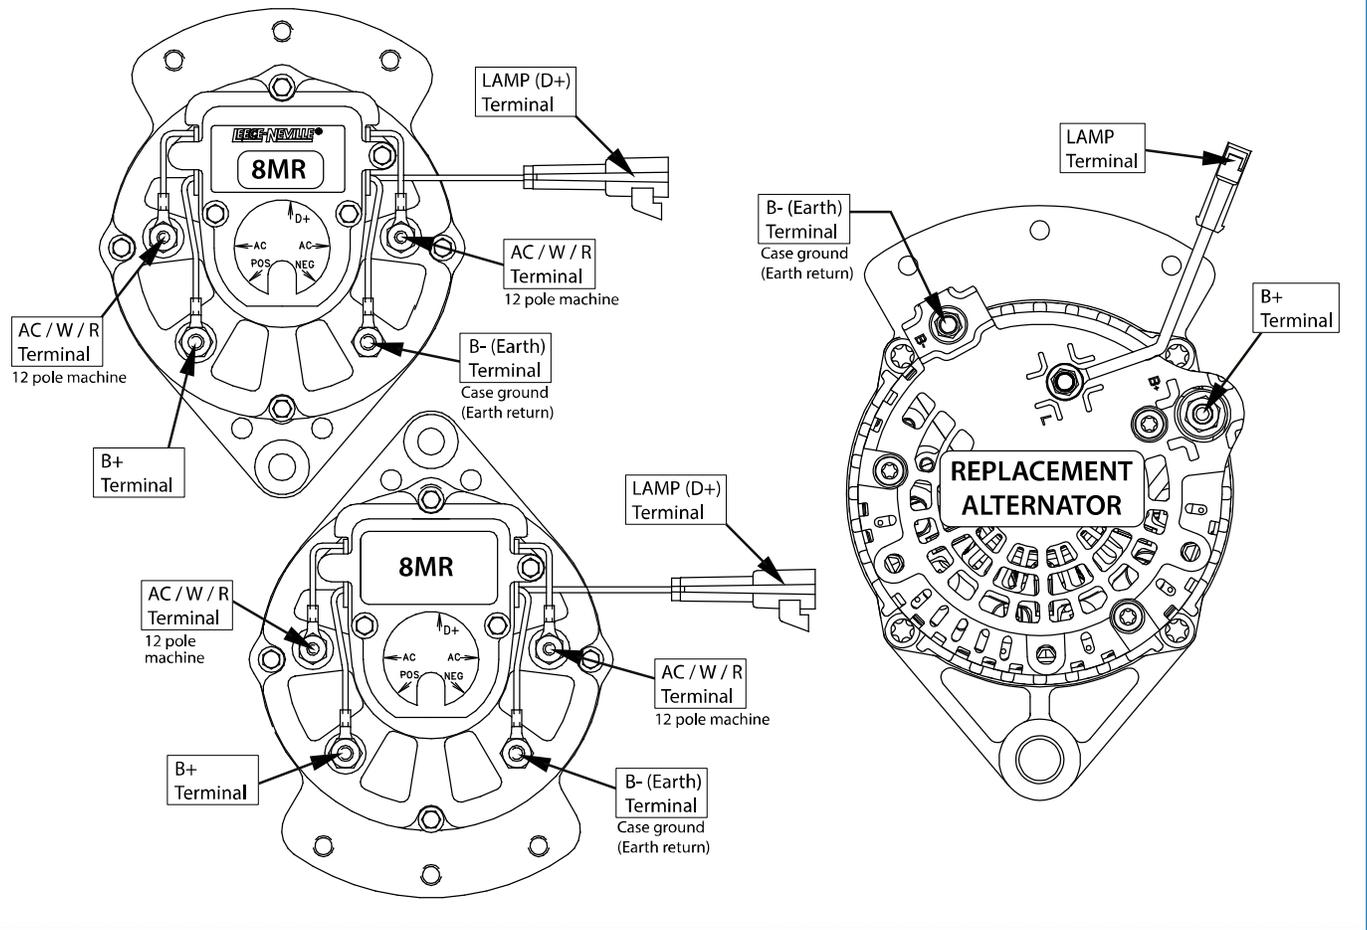

**Important:** The information contained in this bulletin is intended for use by trained, professional technicians who have the proper tools, equipment, and training to perform the required maintenance described above. This information is NOT intended for 'do-it-yourselfers', and you should not assume that this information applies to your equipment. If you have any questions regarding this information please visit our website at [www.prestolite.com](http://www.prestolite.com), or contact our technical service department at:

