


**Source:** Prestolite Electric Leece Neville Heavy Duty Systems  
**Bulletin No:** TWB-0063 **Date:** April 13, 2022  
**Models:** 8MR2069T/TA, 8MR2070T/TA, 8MR2401UA (110-567)  
**Subject:** Wiring Diagram



techservice@prestolite.com

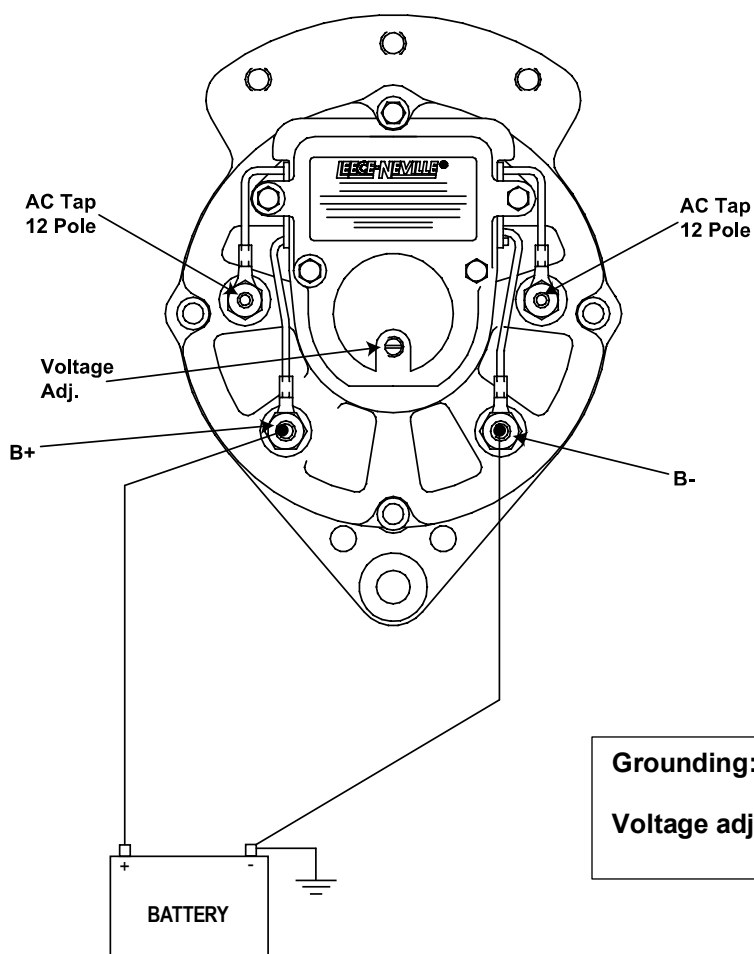

**Grounding: Insulated Return**

**Voltage adjustment range: 13.2V – 15.4V**

**Terminal tightening torque values**

(B+) (B-)	5.7- 6.8 Nm
-----------	-------------

**Important:** The information contained in this bulletin is intended for use by trained, professional technicians who have the proper tools, equipment, and training to perform the required maintenance described above. This information is NOT intended for 'do-it-yourselfers', and you should not assume that this information applies to your equipment. If you have any questions regarding this information please visit our website at [www.prestolite.com](http://www.prestolite.com), or contact our technical service department at:

**Technical Service:** [techservice@prestolite.com](mailto:techservice@prestolite.com)

